

## Mounting the **FRONT**SignLED®



*Thank you for choosing one of our signs*



We have tried very hard to develop and produce a quality sign, which neither in design, light output or technical quality is surpassed.

There is a **FRONT**SignLED® for all common makes and models of lorries and we are continuously developing new designs in line with new lorry models coming on the market.

### 1 Selbst-adhesive foam strip

Attach the supplied levelling strip on the back of the sign. The foam strip levels out any unevenness and has an effective noise-absorbing effect.

### 2 Fittings and screws


Fix the sign to the vehicle with the supplied fittings and screws. Use one fitting on each side and two fittings both top and bottom.

### 3 Sealant

Adjust the sign to the shape of the lorry's curvature and seal with sealant all around the sign.

### 4 Supply lead and rubber lead-through (5)

Connect the light board to the vehicle's power system by connecting to the blue minus and brown positive. Remember a 2A fuse against overvoltage.

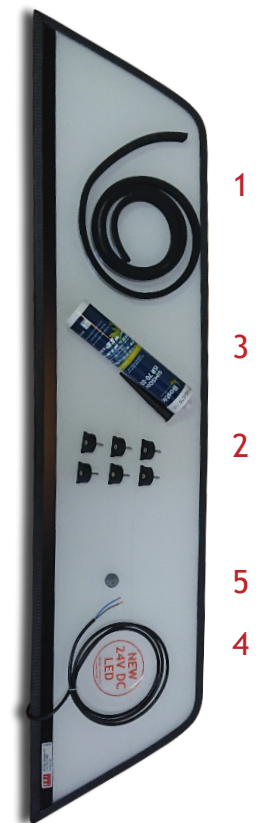

## Cleaning and maintenance of the **FRONT**SignLED®

### Clean with a mild soap solution

NEVER clean the fronts with high-pressure washers or rinsing liquids containing solvents. Clean the sign with regular soapy water with a normal PH value. That's sufficient for cleaning.

The life of the sign can be extended, if you wash the sign often.



010419